



**FEATURES**



- Suitable for general purpose AC switching. They can be used as an ON/OFF function in applications such as static relays, heating regulation, Induction motor starting circuits.
- Minimum Lot-to-Lot variations for robust device performance and reliable operation


**ABSOLUTE MAXIMUM RATINGS (Ta=25°C)**

SYMBOL	PARAMETER	MIN	UNIT
$V_{DRM}$	Repetitive peak off-state voltage	800	V
$V_{RRM}$	Repetitive peak reverse voltage	800	V
$I_{T(RMS)}$	RMS on-state current (full sine wave) $T_j=95^\circ\text{C}$	40	A
$I_{TSM}$	Non-repetitive peak on-state current $t_p=20\text{ms}$	400	A
$T_j$	Operating junction temperature	-40~125	°C
$T_{stg}$	Storage temperature	-40~150	°C
$P_{G(AV)}$	Average gate power dissipation ( $T_j=125^\circ\text{C}$ )	1	W
$R_{th(j-c)}$	Thermal resistance, junction to case	0.9	°C/W

**ELECTRICAL CHARACTERISTICS (Tc=25°C unless otherwise specified)**

SYMBOL	PARAMETER	CONDITIONS	B	C	UNIT	
$I_{RRM}$	Repetitive peak reverse current	$V_R=V_{RRM}$ , $V_R=V_{RRM}$ , $T_j=125^\circ\text{C}$	0.01 2.0	0.01 2.0	mA	
$I_{DRM}$	Repetitive peak off-state current	$V_D=V_{DRM}$ , $V_D=V_{DRM}$ , $T_j=125^\circ\text{C}$	0.01 2.0	0.01 2.0	mA	
$I_{GT}$	Gate trigger current	$V_D=12\text{V}$ ; $R_L=100\ \Omega$	I	50	25	mA
			II	50	25	
			III	50	25	
			IV	100	50	
$I_H$	Holding current	$I_{GT}=0.5\text{A}$ , Gate Open	60	35	mA	
$V_{GT}$	Gate trigger voltage all quadrant	$V_D=12\text{V}$ ; $R_L=100\ \Omega$	1.5		V	
$V_{TM}$	On-state voltage	$I_T=60\text{A}$ ; $t_p=380\ \mu\text{s}$	1.55		V	

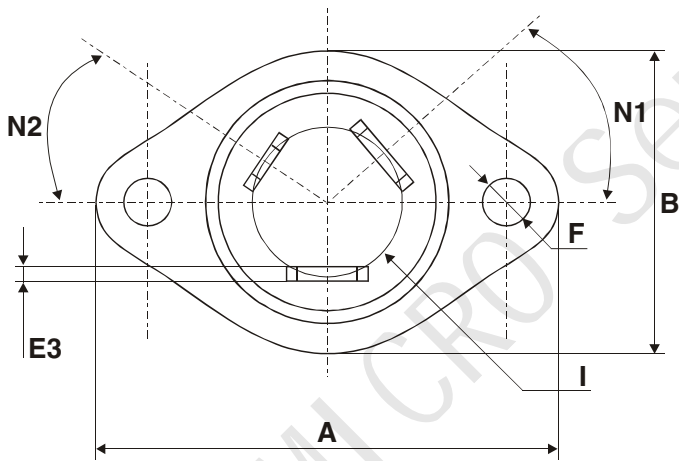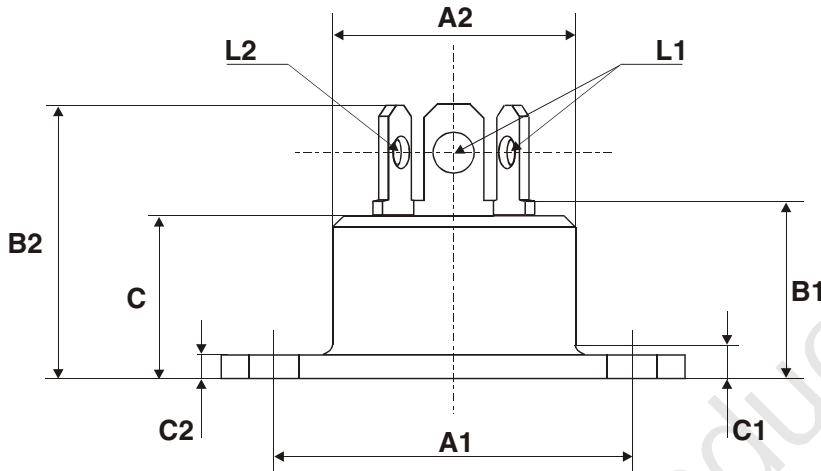**TO-220AB PACKAGE OUTLINE DIMENSIONS**


REF.	DIMENSIONS			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A		40.00		1.575
A1	29.90	30.30	1.177	1.193
A2		22.00		0.867
B		27.00		1.063
B1	13.50	16.50	0.531	0.650
B2		24.00		0.945
C		14.00		0.551
C1		3.50		0.138
C2	1.95	3.00	0.077	0.118
E3	0.70	0.90	0.027	0.035
F	4.00	4.50	0.157	0.177
I	11.20	13.60	0.441	0.535
L1	3.10	3.50	0.122	0.138
L2	1.70	1.90	0.067	0.075
N1	33°	43°	33°	43°
N2	28°	38°	28°	38°